

RIVQUICK® Peel type rivets

Dome head

Note: aluminium body and steel mandrel

Technical information can be found on the last page.




Diameter (d)	Article number	d ₁ nominal size	d ₂ nominal size	Drilling diameter d nominal size	e	
					min.	max.
4	22041340160	4	8.3	4.4	8.0	11.0
	22141340120		8	4.1 - 4.2	3.0	6.0
	22141340160		8	4.1 - 4.2	5.5	10.0
	22141340200		8	4.1 - 4.2	9.5	14.0
	22141340240		8	4.1 - 4.2	13.5	18.0
4.8	22041348120	4.8	9.8	5.3	2.0	6.0
	22041348160		9.8	5.3	6.0	9.5
	22041348200		9.8	5.3	10.0	14.0
	22141348140		9.5	4.9 - 5.0	4.0	8.0
	22141348240		9.5	4.9 - 5.0	13.5	18.0
	22141348300		9.5	4.9 - 5.0	17.5	22.0
	22141348350		9.5	4.9 - 5.0	21.5	27.0
	22141348400		9.5	4.9 - 5.0	26.5	32.0
	22141348450		9.5	4.9 - 5.0	31.5	37.0
22141348500	9.5	4.9 - 5.0	36.5	42.0		

Diameter (d)	Length (l) nominal size	Head thickness	Shear force (N)	Tensile force (N)
4	16	1.4	1250	1250
	12	1.2		1500
	16	1.2		1500
	20	1.2		1500
	24	1.2		1500
4.8	12	1.5	1900	1700
	16	1.5		1700
	20	1.5		1700
	14	1.4		2000
	24	1.4		2000
	30	1.4		2000
	35	1.4		2000
	40	1.4		2000
	45	1.4		2000
50	1.4	2000		

All technical data refer to the measure mm



Symbol list

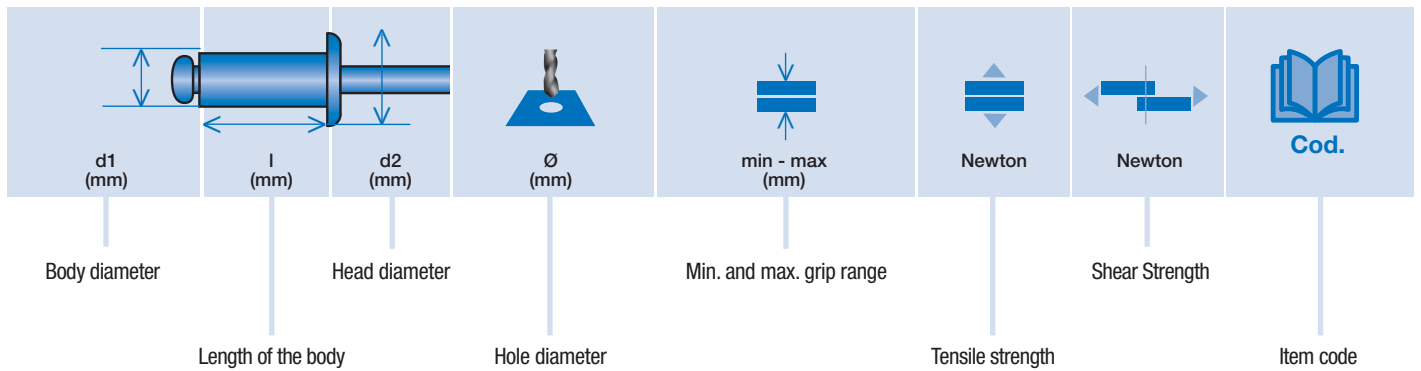

All technical data refer to the measure mm

