

RIVQUICK® Standard rivets

Large head

Note: aluminium body and steel mandrel

Technical information can be found on the last page.




Diameter (d)	Article number	d ₁ nominal size	d ₂ nominal size	Drilling diameter d nominal size	e	
					min.	max.
4	22131440080	4	10	4.1 - 4.2	2.0	4.0
	22131440100				5.0	6.5
	22131440120				7.0	8.5
	22131440140				8.0	10.5
	22131440160				10.0	12.5
	22131440200				13.0	16.5
4.8	22131448080	4.8	14	4.9 - 5.0	2.5	4.0
	22131448100				4.5	6.0
	22131448120				5.5	8.0
	22131448140				7.5	10.0
	22131448160				9.5	12.0
	22131448180				11.5	14.0
	22131448200				13.5	16.0
	22131448240				17.5	20.0
	22131448260				19.5	22.0
	22131448300				23.5	26.0
	22131448350				25.5	31.0
	22131448400				29.5	36.0

Diameter (d)	Length (l) nominal size	Head thickness	Shear force (N)	Tensile force (N)
4	8	1.3	1200	1750
	10			
	12			
	14			
	16			
	20			
4.8	8	1.7	1850	2600
	10			
	12			
	14			
	16			
	18			
	20			
	24			
	26			
	30			
35				
40				

All technical data refer to the measure mm



Symbol list

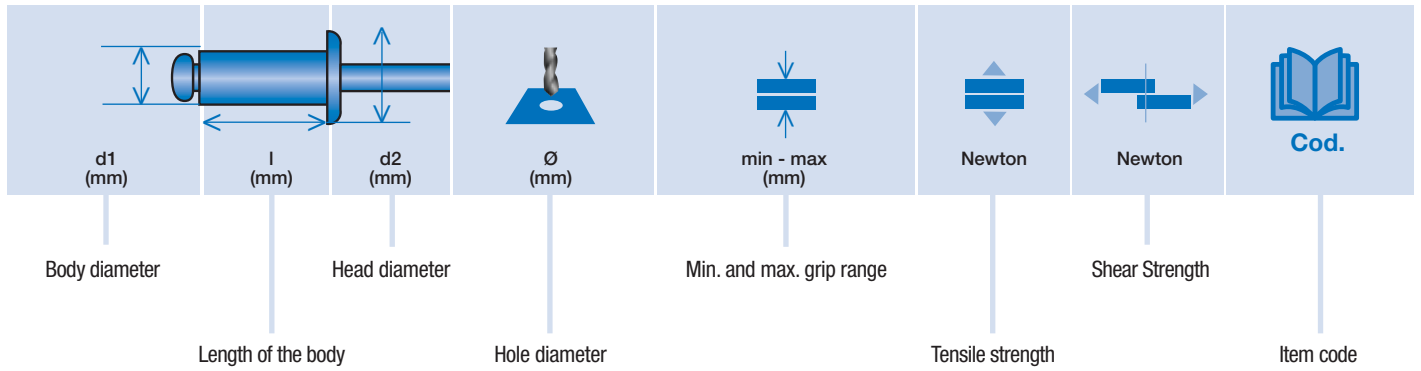

All technical data refer to the measure mm

