

# RIVQUICK® Standard rivets

Countersunk head

Note: aluminium body and steel mandrel

Technical information can be found on the last page.



Diameter (d)	Article number	d <sub>1</sub> nominal size	d <sub>2</sub> nominal size	Drilling diameter d nominal size	e	
					min.	max.
2.4	22131224060	2.4	5	2.5 - 2.55	2.0	4
	22131224080				4.0	6
	22131224100				6.0	8
3	22131230070	3	6	3.1 - 3.2	2.0	4
	22131230090				4.0	6
	22131230110				6.0	8
3.2	22131232070	3.2	6	3.3 - 3.4	2.0	4
	22131232090				4.0	6
	22131232110				6.0	8
4	22131240070	4	7.5	4.1 - 4.2	2.5	4
	22131240090				3.5	6
	22131240110				5.5	8
	22131240120				7.5	9
	22131240140				8.5	11
	22131240160				10.5	13
	22131240180				12.5	15
22131240200	14.5	17				
4.8	22131248070	4.8	9	4.9 - 5.0	2.5	4
	22131248090				3.5	5
	22131248110				4.5	7
	22131248120				6.5	8
	22131248140				7.5	10
	22131248160				9.5	12
	22131248180				11.5	14
	22131248200				13.5	16
	22131248260				19.5	22
22131248300	23.5	26				

Diameter (d)	Length (l) nominal size	Head thickness	Shear force (N)	Tensile force (N)
2.4	6	0.6	400	550
	8			
	10			
3	7	1.0	600	950
	9			
	11			
3.2	7	1.0	750	1000
	9			
	11			

All technical data refer to the measure mm



# RIVQUICK® Standard rivets


Countersunk head

Diameter (d)	Length (l) nominal size	Head thickness	Shear force (N)	Tensile force (N)
4	7	1.2	1200	1750
	9			
	11			
	12			
	14			
	16			
	18			
4.8	20	1.3	1850	2600
	7			
	9			
	11			
	12			
	14			
	16			
	18			
20				
	26			
	30			

All technical data refer to the measure mm



### Symbol list

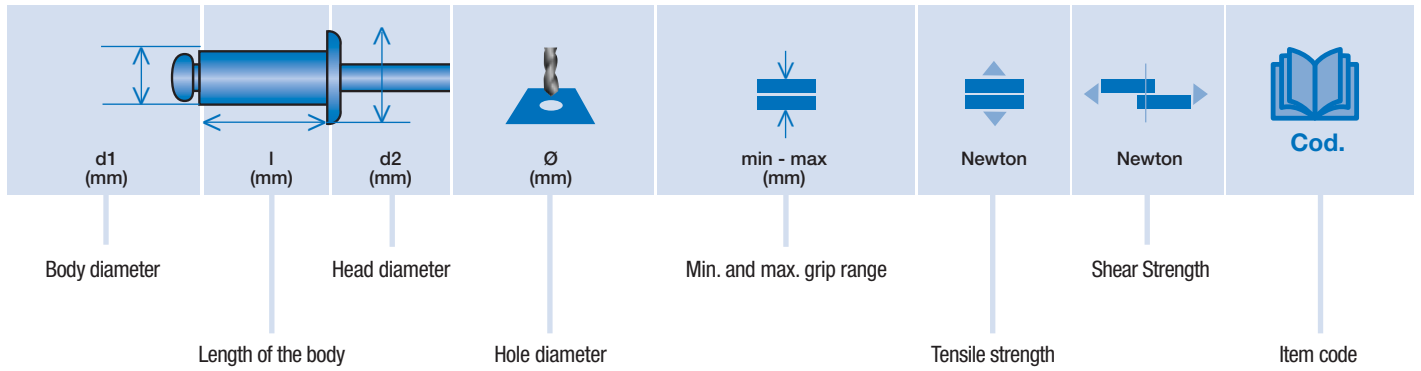

All technical data refer to the measure mm

