

RIVQUICK® Coloured blind rivets

Dome head | Colored rivet white RAL9010

Note: aluminium body and steel mandrel

Technical information can be found on the last page.



Diameter (d)	Article number	d ₁ nominal size	d ₂ nominal size	Drilling diameter d nominal size	e	
					min.	max.
3	22161130064	3	6.5	3.1 - 3.2	1.0	3.0
	22161130084			3.1 - 3.2	3.0	5.0
	22161130104			3.1 - 3.2	5.0	7.0
	22161130124			3.1 - 3.2	7.0	9.0
3.2	22161132064	3.2	6.5	3.3 - 3.4	1.0	3.0
	22161132084			3.3 - 3.4	3.0	5.0
	22161132104			3.3 - 3.4	5.0	7.0
4	22161140074	4	8	4.1 - 4.2	2.0	3.5
	22161140084			4.1 - 4.2	3.0	4.5
	22161140094			4.1 - 4.2	4.0	5.5
	22161140104			4.1 - 4.2	5.0	6.5
	22161140114			4.1 - 4.2	6.0	7.5
	22161140124			4.1 - 4.2	7.0	8.5
	22161140164			4.1 - 4.2	10.0	12.5
	22161140184			4.1 - 4.2	12.0	14.5
4.8	22161148124	4.8	9.5	4.9	6.0	8.0
	22161148074			4.9 - 5.0	1.5	3.0
	22161148084			4.9 - 5.0	2.5	4.0
	22161148094			4.9 - 5.0	3.5	5.0
	22161148104			4.9 - 5.0	4.5	6.0
	22161148114			4.9 - 5.0	5.5	7.0
	22161148124			4.9 - 5.0	6.5	8.0
	22161148144			4.9 - 5.0	7.5	10.0
22161148164	4.9 - 5.0	9.5	12.0			

Diameter (d)	Length (l) nominal size	Head thickness	Shear force (N)	Tensile force (N)
3	6	0.9	600	950
	8		600	950
	10		600	950
	12		600	950
3.2	6	0.9	750	1000
	7		750	1000
	8		750	1000

All technical data refer to the measure mm



RIVQUICK® Coloured blind rivets


Dome head | Colored rivet white RAL9010

Diameter (d)	Length (l) nominal size	Head thickness	Shear force (N)	Tensile force (N)
4	7	1.2	1200	1750
	8		1200	1750
	9		1200	1750
	10		1200	1750
	11		1200	1750
	12		1200	1750
	16		1200	1750
	18		1200	1750
4.8	20	1.4	1200	1750
	12		1750	2300
	7		1850	2600
	8		1850	2600
	9		1850	2600
	10		1850	2600
	11		1850	2600
	12		1850	2600
	14		1850	2600
	16		1850	2600

All technical data refer to the measure mm



Symbol list

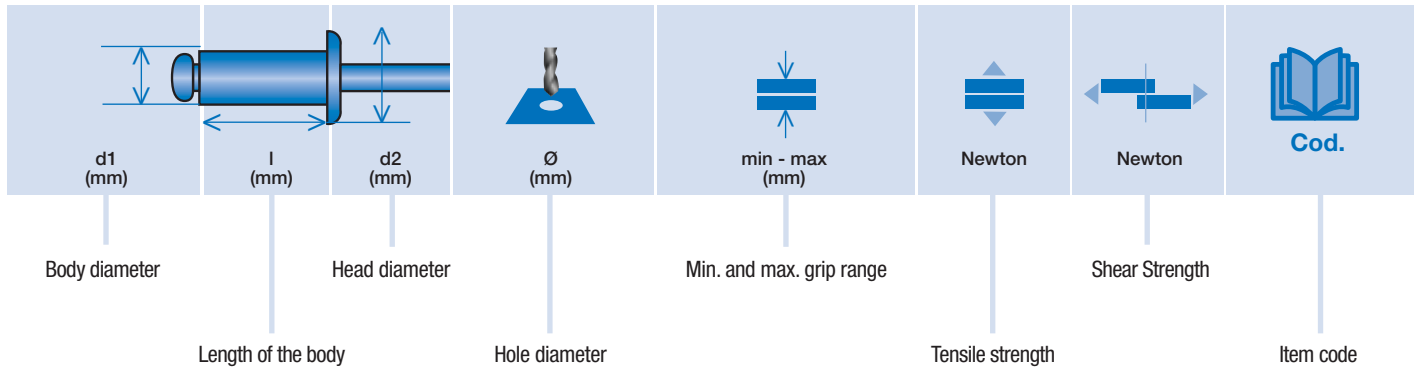

All technical data refer to the measure mm

